



ITEM: _____ PROJECT NAME: _____ DATE: _____

HYBRID MERCHANDISER

**SERVICE NON-REFRIGERATED
OVER SELF-SERVE REFRIGERATED**

MODEL ☐ **CD3628/RSS3SC**
☐ **CD4828/RSS4SC**
☐ **(2)CD3628/RSS6SC**

**SELF-SERVE NON-REFRIGERATED
OVER SELF-SERVE REFRIGERATED**

MODEL ☐ **CD3628SS/RSS3SC**
☐ **CD4828SS/RSS4SC**
☐ **(2)CD3628SS/RSS6SC**



*Display more product and serve more customers with presentation and value in mind.
Cases are available in lengths of 36", 48", and 72".*

STANDARD FEATURES

Refrigerated Self-Serve Bottom Display

- Black laminated exterior. Other finishes available.
- Black trim. Silver optional.
- Black interior, glass ends.
- Horizontal LED top and front light.
- Two tiers black metal shelves.
- Electronic temperature control maintains 38° to 40° case temperature. Note: Case temperature will vary if the air curtain is disrupted.
- Cord and plug. (Not available on RSS6SC.)
- Condensate evaporator (separate circuit required on model RSS6SC)

Service or Self-Serve Non-Refrigerated Top Display

- Two tiers black wire shelves.
- Top light and shelf lights.
- Sliding rear doors.
- Black trim.
- Self-Serve has three hinged lift-up front doors.

NON-REFRIGERATED OVER SELF-SERVE REFRIGERATED MERCHANDISER

OPTIONAL ACCESSORIES:


For Top Display

- ☐ Glass Shelves
- ☐ Reflective Ends
- ☐ Reflective Rear Doors


For Self-Serve Refrigerated Base

- ☐ Energy Saving Night Curtain
- ☐ Silver Trim
- ☐ Special Base Finish
- ☐ Mirrored Interior Ends
- ☐ Security Night Cover
- ☐ Stainless Steel Steps in Lieu of Metal Shelves
- ☐ Reflective End Glass

SERVICE NON-REFRIGERATED OVER SELF-SERVE REFRIGERATED

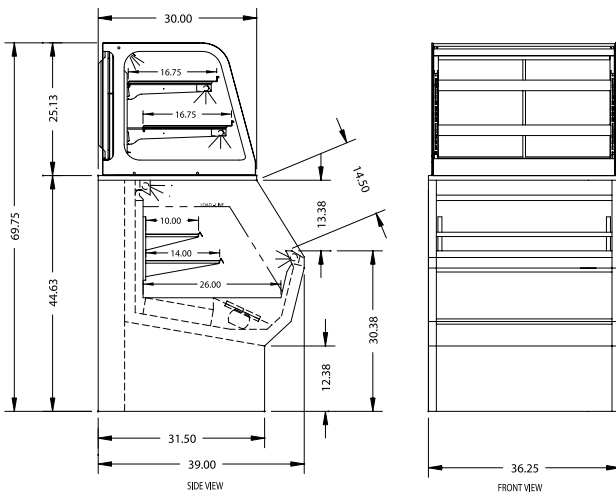

SELF-SERVE NON-REFRIGERATED OVER SELF-SERVE REFRIGERATED

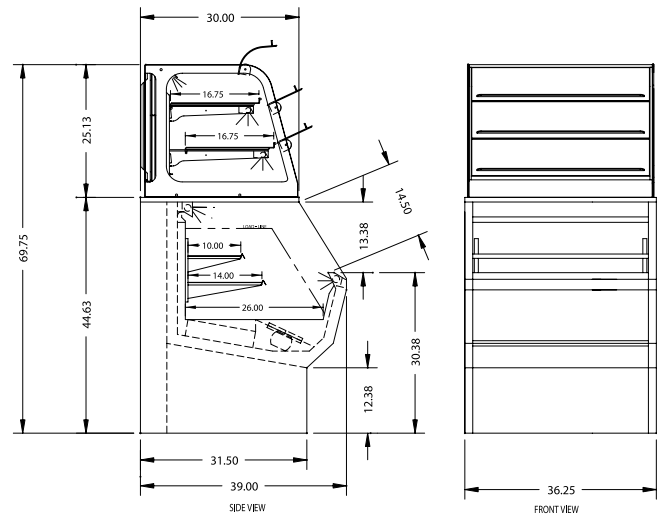

SPECIFICATIONS:

Model	Dimensions L W H	Approx. Shipping Weight (lbs)	Bottom Display 120/60/1 (NEMA 5-20P)	Top Display 120/60/1 (NEMA 5-15P)
<input type="checkbox"/> CD3628/RSS3SC	36 1/4" x 39" x 69 3/4"	847	1/3 HP • 14.8 AMPS	1.5 AMPS
<input type="checkbox"/> CD4828/RSS4SC	48" x 39" x 69 3/4"	1,010	1/2 HP • 16.0 AMPS	1.5 AMPS
<input type="checkbox"/> (2)CD3628/RSS6SC *	72" x 39" x 69 3/4"	1,500	3/4 HP • 16.0 AMPS	(2) 1.5 AMPS
<input type="checkbox"/> CD3628SS/RSS3SC	36 1/4" x 39" x 69 3/4"	780	1/3 HP • 14.8 AMPS	1.5 AMPS
<input type="checkbox"/> CD4828SS/RSS4SC	48" x 39" x 69 3/4"	900	1/2 HP • 16.0 AMPS	1.5 AMPS
<input type="checkbox"/> (2)CD3628SS/RSS6SC *	72" x 39" x 69 3/4"	1,300	3/4 HP • 16.0 AMPS	(2) 1.5 AMPS

*On the RSS6SC a separate 120/60/1 15 AMP circuit is required for the condensate evaporator.

- If a GFCI circuit is required, a GFCI Breaker Must be used instead of GFCI recepticle.
- Refrigerated cases are designed to operate in an environment of 75°F ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.



The Signature of Quality

FEDERAL INDUSTRIES
A Standex Company

215 FEDERAL AVENUE, BELLEVILLE, WISCONSIN 53508-9201

PHONE: 800-356-4206

EMAIL: geninfo@federalind.com

FAX: 608-424-3234

WEBSITE: www.federalind.com

