

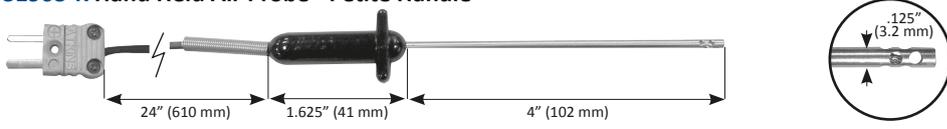
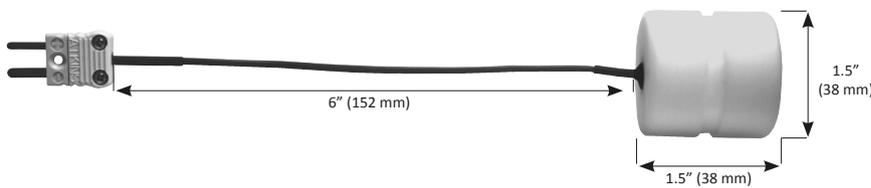
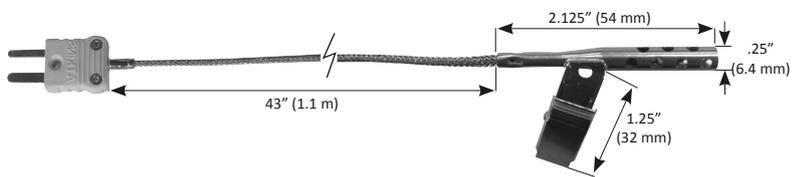
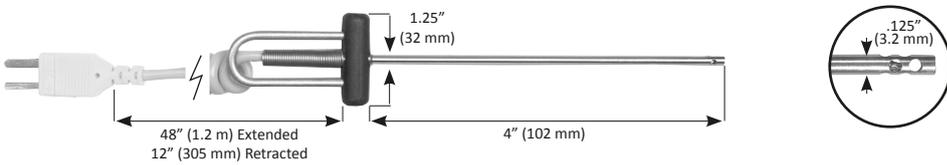


AMBIENT / AIR PROBES

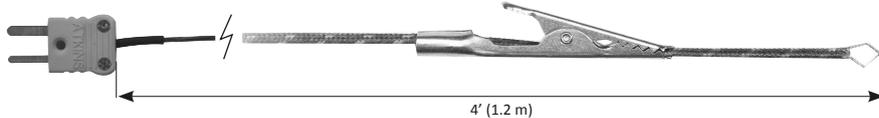

Suitable for measuring air temperatures. Some hand-held probes are designed to measure ambient air temperature, while other models monitor internal temperatures and include a clip for attaching the sensor inside freezers, coolers or ovens. Make sure to check each model for usage, recommendations and maximum temperature limits.

Note: Air has a low thermal conductivity and density which results in slower probe response times. To achieve a more rapid response in air temperature, wave the probe tip back and forth to create air motion across the probe tip.

<p>6030MK Bead Probe</p> 	<p>Temp. Range: -100° to 500°F (-73° to 260°C) Max Tip/Cable Temp: 500°F (260°C) Response Time: .5 seconds in 5m/sec. air stream Unit Weight: .3 oz (8.5 g) Flexible FEP Outer Jacket</p>
<p>31903-K Hand Held Air Probe - Petite Handle</p> 	<p>Temp. Range: -40° to 400°F (-40° to 205°C) Max Tip/Cable Temp: 400°F (205°C) Max Handle Temp: 300°F (149°C) Response Time: 9 seconds in 5m/sec. air stream Unit Weight: 1 oz (28 g) Flexible Cable with Silicone Jacket</p>
<p>52048-K Thermocouple Solid Simulator Probe</p> 	<p>Temp. Range: -40° to 180°F (-40° to 82°C) Max Tip Temp: 180°F (82°C) Max Cable Temp: 400°F (204°C) Response Time: Up to 2 hours Unit Weight: 2.5 oz (71 g) Flexible Cable with FEP Jacket</p>
<p>50306-K / 50302 (J, K or T) Oven / Freezer Probe with Clip</p> 	<p>50306-K Temp. Range: -100° to 600°F (-73° to 316°C) Max Temp: 600°F (316°F) Response Time: 10 seconds in 5m/sec. air stream Unit Weight: 1 oz (28 g) Flexible Cable with Woven Stainless Steel Overbraid</p> <p>50302 Industrial Air Probe w/ Clip Temp. Range: 32° to 896°F (0° to 480°C) Max Tip/Cable Temp: 896°F (480°C) Cable Length: 46" (1.16 m) Flexible Cable with Fiberglass Jacket Note: Not recommended for use in foodservice.</p>
<p>50332 / 39302 (J, K or T) Hand Held Air Probe</p> 	<p>50332 - Coiled Cable Temp. Range: -100° to 500°F (-73° to 260°C) Max Tip Temp: 500°F (260°C) Max Cable Temp: 176°F (80°C) Handle Temp: 280°F (138°C) Response Time: 10 seconds in 5m/sec. air stream Unit Weight: 2 oz (57 g) Coiled Retractable Cable</p> <p>39302 Straight Cable Temp. Range: -328° to 400°F (-200° to 205°C) Max Tip/Cable Temp: 400°F (205°C) Response Time: 11 seconds in 5m/sec. air stream Cable Length: 36" (914 mm) Unit Weight: 1 oz (28 g) Flexible Cable with FEP Jacket</p>
<p>50338 (J, K or T) Industrial Air Probe with Alligator Clip</p> 	<p>Temp. Range: 32° to 896°F (0° to 480°C) Max Tip/Cable Temp: 896°F (480°C) Response Time: 9 seconds in 5m/sec. air stream Unit Weight: 1 oz (28 g) Flexible Cable with Fiberglass Jacket & Movable Clip. Note: Not recommended for use in foodservice.</p>