

**FEDERAL INDUSTRIES**

A Standex Company

215 Federal Avenue Belleville  
Wisconsin 53508-9201**Phone:** 800-356-4206**Fax:** 608-424-3234**Email:** Geninfo@Federalind.com**Website:** Federalind.com

Project Name: \_\_\_\_\_

Item #: \_\_\_\_\_

Model #: \_\_\_\_\_ Qty: \_\_\_\_\_

Approval: \_\_\_\_\_

AIA #

SIS #

**Italian Glass Refrigerated Self-Serve Merchandiser (Drop-In)**

Designed for customers looking for rich, up-scale Italian styling for maximum visual appeal that will drive product sales. Cases are available in lengths of 36", 48", and 60"



Model ITRSS3634 Shown  
\*Counter Not Provided

**OPTIONAL ACCESSORIES**

- |                                                       |                                                              |
|-------------------------------------------------------|--------------------------------------------------------------|
| <input type="checkbox"/> Stainless Steel Shelving     | <input type="checkbox"/> Reflective Ends                     |
| <input type="checkbox"/> Condensate Pump              | <input type="checkbox"/> Remote Condensing Unit              |
| <input type="checkbox"/> Cord & Plug (SC models only) | <input type="checkbox"/> Joining Kit for Continuous Line-Ups |
| <input type="checkbox"/> Reflective Rear Doors        |                                                              |

| MODEL                              | LENGTH<br>(Includes End Panels)               |
|------------------------------------|-----------------------------------------------|
| <input type="checkbox"/> ITRSS3626 | 36 x 33 x 42.7 (in)<br>914 x 838 x 1085 (mm)  |
| <input type="checkbox"/> ITRSS4826 | 48 x 33 x 42.7 (in)<br>1219 x 838 x 1085 (mm) |
| <input type="checkbox"/> ITRSS6026 | 60 x 33 x 42.7 (in)<br>1524 x 838 x 1085 (mm) |
| <input type="checkbox"/> ITRSS3634 | 36 x 33 x 50.7 (in)<br>914 x 838 x 1288 (mm)  |
| <input type="checkbox"/> ITRSS4834 | 48 x 33 x 50.7 (in)<br>1219 x 838 x 1288 (mm) |
| <input type="checkbox"/> ITRSS6034 | 60 x 33 x 50.7 (in)<br>1524 x 838 x 1288 (mm) |

**STANDARD FEATURES****Model Features**

- Stainless steel interior
- All tempered thermo-pane glass construction
- Removable sliding glass rear doors
- Rear air intake and discharge

**Refrigeration**

- Electronic temperature control with on demand defrost
- PTC Condensate evaporator provided for a totally self-contained system
- Easily accessible light switch, power switch, and electronic temperature control
- Average product temperature of 38°F (3.3°C) to 40°F (4.4°C)
- Proper ventilation of counter is required for proper performance
- Rear air intake and discharge
- Energy saving Night Curtain
- R134A Refrigerant

**Shelving**

- Adjustable tempered glass shelves. Shelves are adjustable up and down and can be tilted in two positions ( 0°/ 5° angle). 34" (864mm) models have three tiers of shelves; 26" (660mm) models have two tiers of shelves

**Lighting**

- 3500K LED top light and shelf lights
- DLC Certified, IP66 rated

**Agency Approvals**

- UL, C-UL, and UL Sanitation Listed to NSF-7, Type I conditions
- DOE 2017 Compliant




Note: Information is subject to change at any time. Visit [www.federalind.com](http://www.federalind.com) For the most current specs.

|       |                                                                                                       |
|-------|-------------------------------------------------------------------------------------------------------|
| AIA # | <h1>Italian Glass Refrigerated Self-Serve Merchandiser (Drop-In)</h1> <h2>Product Specifications</h2> |
| SIS # |                                                                                                       |

| Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below. |                                  |                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|-----------------------|
| Zone                                                                                                                                                                          | Intended product to be displayed | Avg prod temp °F / °C |
| All                                                                                                                                                                           | Packaged refrigerated products   | 38°F / (3.3°C)        |

DIMENSION: xx"/(mm)

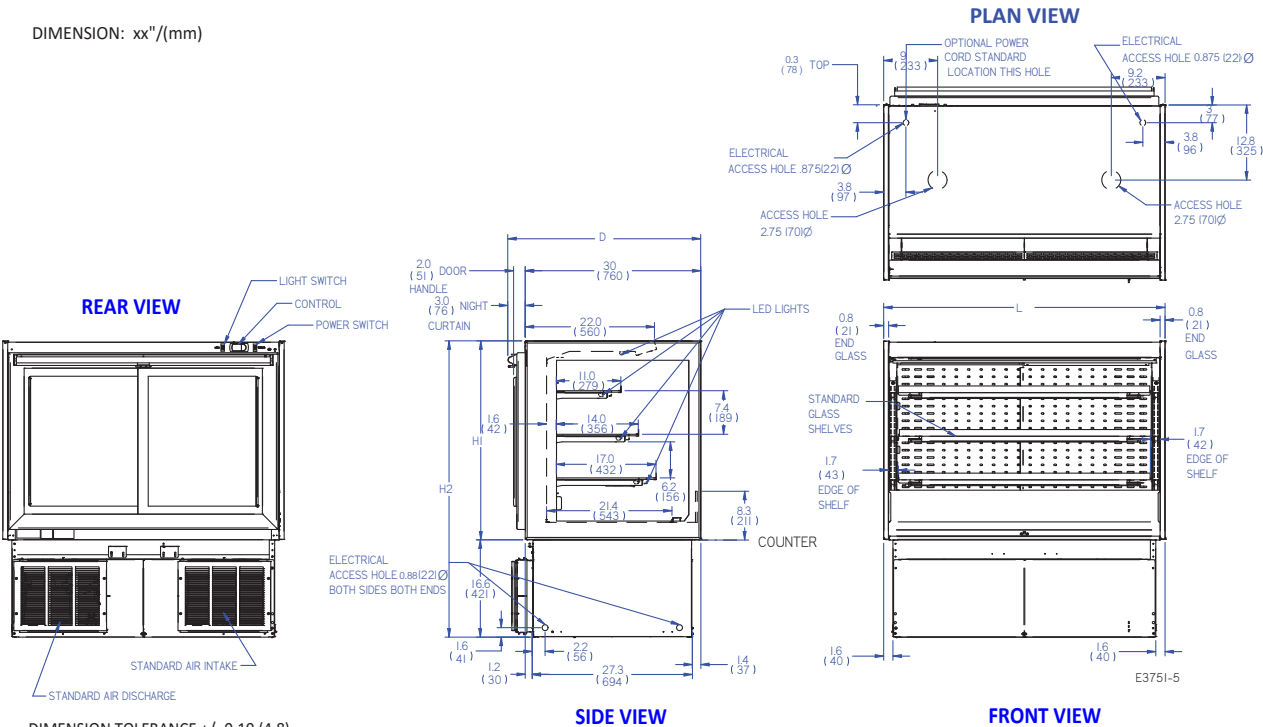

DIMENSION TOLERANCE +/- 0.19 (4.8)

| MODEL     | DIMENSIONS |     |     |      |       | SHIPPING WHT |      | SELF CONTAINED |             | OPTIONAL NEMA PLUG | REMOTE   |             | BTU @ 20°F | COUNTER CUTOUT |      |       |
|-----------|------------|-----|-----|------|-------|--------------|------|----------------|-------------|--------------------|----------|-------------|------------|----------------|------|-------|
|           | L          | D   | H1  | H2   | UNITS | LBS          | KILO | VOLTAGE        | AMPS        |                    | VOLTAGE  | AMPS        |            | L              | W    | UNITS |
| ITRSS3626 | 36         | 33  | 26  | 42.7 | in.   | 520          | 236  | 120/60/1       | MAX FUSE 20 | NEMA 5-20          | 120/60/1 | MAX FUSE 15 | 3900       | 33.4           | 27.7 | in.   |
|           | 914        | 838 | 661 | 1085 | mm.   |              |      |                |             |                    |          |             |            | 848            | 704  | mm.   |
| ITRSS4826 | 48         | 33  | 26  | 42.7 | in.   | 635          | 288  | 120/60/1       | MAX FUSE 25 | NEMA 5-20          | 120/60/1 | MAX FUSE 15 | 4700       | 45.4           | 27.7 | in.   |
|           | 1219       | 838 | 661 | 1085 | mm.   |              |      |                |             |                    |          |             |            | 1153           | 704  | mm.   |
| ITRSS6026 | 60         | 33  | 26  | 42.7 | in.   | 760          | 345  | 208-240/60/1   | MAX FUSE 20 | NEMA 6-15          | 120/60/1 | MAX FUSE 15 | 5750       | 57.4           | 27.7 | in.   |
|           | 1524       | 838 | 661 | 1085 | mm.   |              |      |                |             |                    |          |             |            | 1458           | 704  | mm.   |
| ITRSS3634 | 36         | 33  | 34  | 50.7 | in.   | 560          | 254  | 120/60/1       | MAX FUSE 20 | NEMA 5-20          | 120/60/1 | MAX FUSE 15 | 3900       | 33.4           | 27.7 | in.   |
|           | 914        | 838 | 864 | 1288 | mm.   |              |      |                |             |                    |          |             |            | 848            | 704  | mm.   |
| ITRSS4834 | 48         | 33  | 34  | 50.7 | in.   | 670          | 304  | 120/60/1       | MAX FUSE 25 | NEMA 5-20          | 120/60/1 | MAX FUSE 15 | 4700       | 45.4           | 27.7 | in.   |
|           | 1219       | 838 | 864 | 1288 | mm.   |              |      |                |             |                    |          |             |            | 1153           | 704  | mm.   |
| ITRSS6034 | 60         | 33  | 34  | 50.7 | in.   | 795          | 361  | 208-240/60/1   | MAX FUSE 20 | NEMA 6-15          | 120/60/1 | MAX FUSE 15 | 5750       | 57.4           | 27.7 | in.   |
|           | 1524       | 838 | 864 | 1288 | mm.   |              |      |                |             |                    |          |             |            | 1458           | 704  | mm.   |

- Refrigerated cases are designed to operate in a maximum of 75°F (24°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.
- Counter must have adequate ventilation for proper case performance.
- Packaged food products placed in case must be pre-chilled before placing in case.

DOE 2017  
Energy Efficiency  
Compliant

UL US

ANSI/NSF 7