



a Standex company

ITEM: _____ PROJECT NAME: _____ DATE: _____

REFRIGERATED SELF-SERVE ISLAND MERCHANDISER

MODEL ☐ **IMSS60SC-2**
☐ **IMSS60SC-3**
☐ **IMSS84SC-2**
☐ **IMSS84SC-3**



Designed with impulse sales in mind. Get maximum return and increased profits with shop-around merchandising.


STANDARD FEATURES

- Adjustable black metal shelves, two or three tiers.
- LED top and undershelf lighting.
- Black metal base, interior and canopy. Choice of six standard laminates on exterior. Other color laminates are optional.
- Air deflector.
- Condensate evaporator provided for a totally self-contained system.
- Easy clean, rustproof insulated evaporator coil compartment.
- Easily accessible light switch and temperature control.
- Adjustable feet.
- Models IMSS60SC-2 and Remote units come Standard with Condensate Pump.
- Refrigeration controls maintain 38° - 40° F. Note: Case temperature will vary if the air curtain is disrupted.
- R404 Refrigerant.
- Insulated with high-density foam.
- Thermometer.
- UL Safety and UL Sanitation Listed to NSF Standard No. 7.

REFRIGERATED SELF-SERVE ISLAND MERCHANDISER

OPTIONAL ACCESSORIES:

- ☐ Special Color Laminated Exterior Finish
- ☐ Recessed Casters or Legs
- ☐ Cord and Plug (NEMA 6-20P)
- ☐ Remote Refrigeration
- ☐ Condensate Pump
- ☐ Cart Bumper
- ☐ Top-Mounted Electrical
- ☐ Condensate Evaporator Assembly (Field Install) (Separate 208-240V, 15A circuit required)(Part#40-19996)

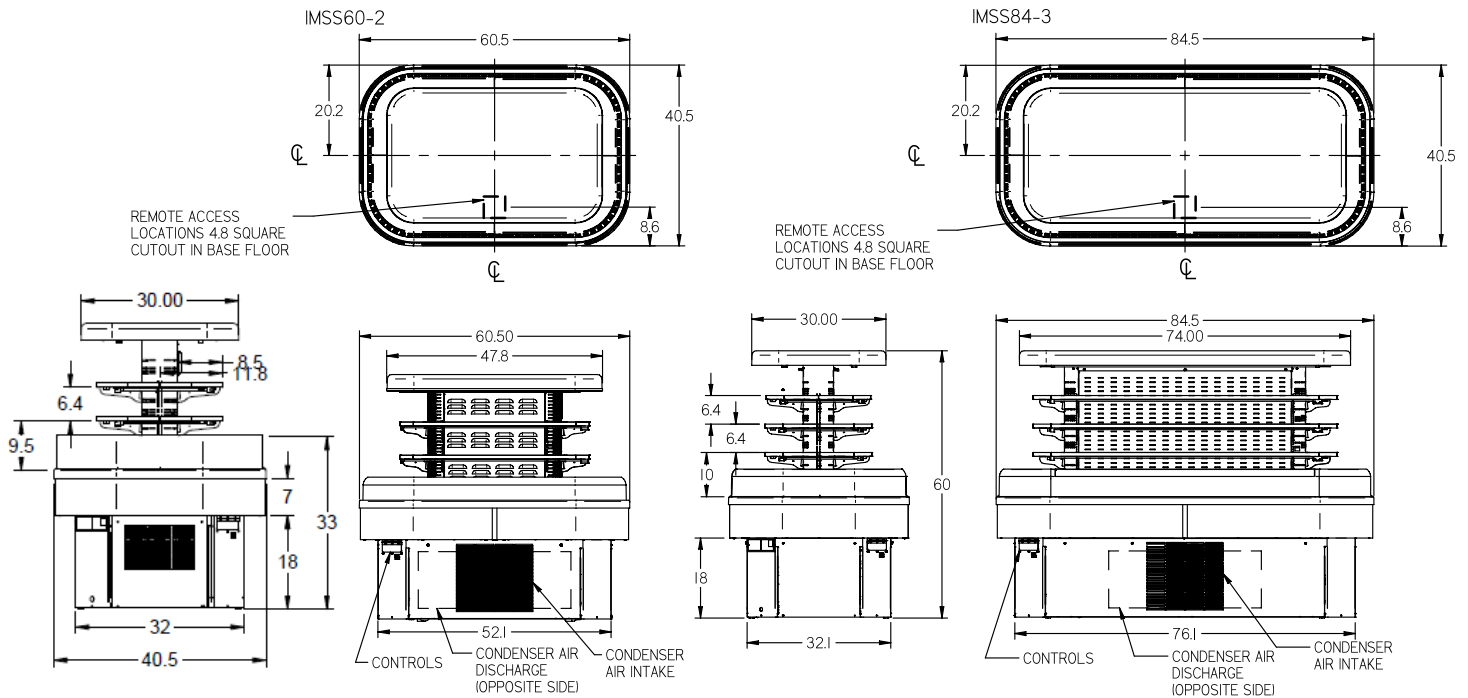

SPECIFICATIONS:

Model	Dimensions L W H	Shipping Weight (lbs)	Display Area (square feet)	Self-Contained with Condensate Pan 208-240/60/1	Remote with Condensate Pan 208-240/60/1
☐ IMSS60SC-2	60" x 40" x 55"	860	2 Tiers - 24.0	1 1/2 HP • 20 AMPS	10 AMPS
☐ IMSS60SC-3	60" x 40" x 60"	910	3 Tiers - 31.3	1 1/2 HP • 20 AMPS	10 AMPS
☐ IMSS84SC-2	84" x 40" x 55"	1,000	2 Tiers - 31.7	1 1/2 HP • 20 AMPS	10 AMPS
☐ IMSS84SC-3	84" x 40" x 60"	1,375	3 Tiers - 41.4	1 1/2 HP • 20 AMPS	10 AMPS

- NOTE WHEN DIRECT WIRING THE CASE - A 25 AMP MINIMUM CIRCUIT IS REQUIRED ON THE IMSS60SC AND A 30 AMP MINIMUM CIRCUIT IS REQUIRED ON THE IMSS84SC.
- Cas temperature will vary if the air curtain is disrupted.
- Refrigerated cases are designed to operate in a maximum environment of 75°F ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.



The Signature of Quality

FEDERAL INDUSTRIES
A Standex Company

215 FEDERAL AVENUE, BELLEVILLE, WISCONSIN 53508-9201

PHONE: 800-356-4206

EMAIL: geninfo@federalind.com

FAX: 608-424-3234

WEBSITE: www.federalind.com

