



STAINLESS STEEL Underbar Hand Sinks NSF

18" and 21" Wide Units

SL-HS Series
18" Wide Units With
Splash Mount Faucets



CR-HS Series
21" Wide Units With
Deck Mount Faucets

Conforms To NSF 61/9 Lead Free Requirements

Item #: _____ Qty #: _____
Model #: _____
Project #: _____

FEATURES:

29" Working Height
10" x 14" x 10" sink bowl.
4" backsplash.
Includes four galvanized legs with adjustable plastic bullet feet.
Adjustable galvanized side cross-bracing.
CR-HS Series has rear deck for extra storage

MECHANICAL:

SL-HS Series: Includes K-125 splash mount swing spout faucet.
CR-HS Series: Includes K-51 deck mount swing spout faucet.
All faucets meet federal lead free standards.
1 1/2" IPS drain

MATERIAL:

Sink Bowl & Sides: 20 gauge, 300 stainless steel
Front Apron & Backsplash: 22 gauge, 300 stainless steel
Legs: 1 5/8" O.D. 18 gauge, galvanized steel
with adjustable plastic bullet feet

OPTIONAL:

A-15 - Chrome towel ring (packed loose)
K-316-LU - Add wrist handles
SU-10A - 18" stainless steel leg upgrade with cross-bracing
SU-18R or L - Right or left side splash for 18" wide sink
SU-18RL - Right and left side splash for 18" wide sink
SU-21R or L - Right or left side splash for 21" wide sink
SU-21RL - Right and left side splash for 21" wide sink
SU-40 - Prep unit for installation of speed rail

For More Accessories & Modifications, Visit Us At www.advancetabco.com.

18" WIDE Model #	Approx. Weight	Approx. Cu. Ft.	21" WIDE Model #	Approx. Weight	Approx. Cu. Ft.	O.A. Length (A)	Drain Location (B)
SL-HS-12	31 lbs.	5	CR-HS-12	32 lbs.	5	12"	4 1/2"
SL-HS-15	34 lbs.	6	CR-HS-15	35 lbs.	6	15"	6"

WARNING: Equipment that include faucets on this page may contain a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.



Customer Service Available To Assist You **1-800-645-3166** 8:30 am - 8:00 pm E.S.T.

For Orders & Customer Service:
Email: customer@advancetabco.com or Fax: 631-242-6900


For Smart Fabrication™ Quotes:
Email: smartfab@advancetabco.com or Fax: 631-586-2933

DIMENSIONS and SPECIFICATIONS

TOL Overall: $\pm .500"$ Interior: $\pm .250"$

ALL DIMENSIONS ARE TYPICAL

SL-HS Series

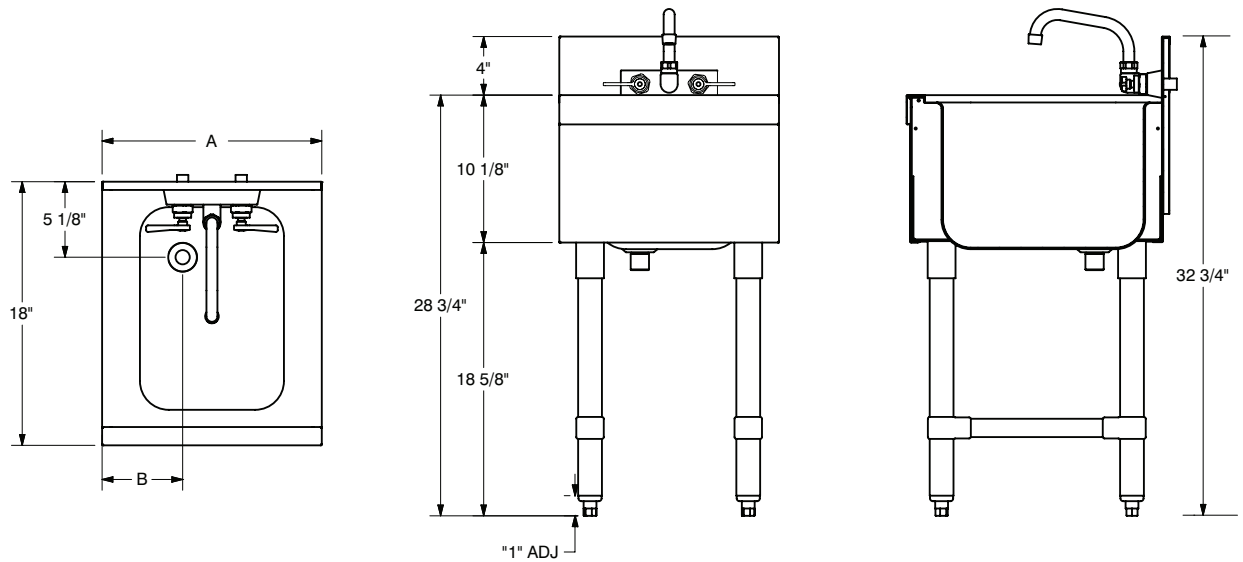

CR-HS Series

